

TM560

5.6" TFT LCD Digital Touch-Button Monitor


www.vipro.com.tw



Key Features

- Automatic backlighting for buttons
- Control monitor with finger tips on the touch button system
- TFT LCD monitor with wide view angle and high resolution display
- Adjustable image for horizontal, vertical, mirror and normal viewing
- Multi-lingual OSD: English, Dutch, French, German, Italian, Portuguese, Russian, Spanish
- Mirror/Normal image switch available
- Automatically switch to back-up, left or right side camera views
- Full-function remote controller
- Multiple video formats: PAL/NTSC/AUTO
- 13-Pin:3 cameras inputs
- 22-Pin:4 cameras inputs, 1 video and 1 audio output
- Wide power supply: 10V~32V; Support 12V or 24V automobile battery
- Built-in speaker

Dimensions

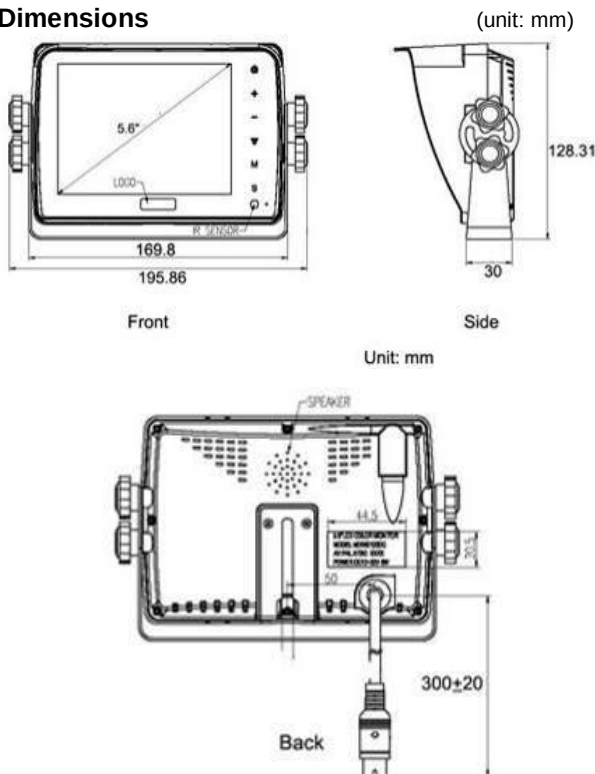


- ✓ Automatic backlighting for buttons
- ✓ Adjustable horizontal, vertical, mirror and normal view
- ✓ Mirror/Normal image switch available
- ✓ Automatic switch to back-up, left/right side camera view
- ✓ Wide power supply: 10V~32V; Support 12V or 24V automobile battery

Technical Specifications

Product series	5.6" TFT LCD Digital Touch-Button Monitor
Model	TM560
Audio output	1W
Loudspeaker	One 40 mm round loudspeaker
Dot pitch	0.0588 (H) x 0.1764 (V)
Resolution	640×3 (RGB) × 480
Contrast	500:1
Brightness	200cd/m ²
Viewing angle	U: 50° / D: 70°, R/L: 70°/70°
Outer dimension (W x H x T)	166.5mm x 115mm x 32.3mm / 6.555" x 4.528" x 1.272"
Power supply	Automobile storage battery (10-32V)
Power consumption	about 5W
Operating temperature	-20°C~ 70°C/ -4°F~158°F
Storage temperature	-30°C~80°C/ -22°F~176°F
Relative Humidity	RH90%
Certifications	CE, FCC

Accessories

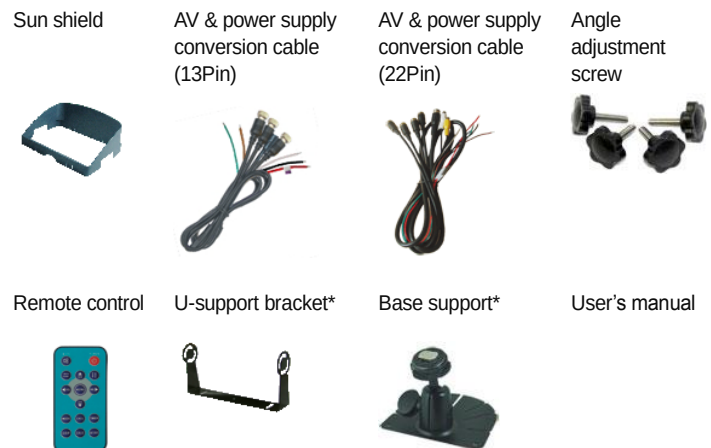

(*): optional, excluded from standard package