

MVR-315A

5CH AHD Hybrid Mobile DVR

www.vipro.com.tw



Ultra-reliable HD hybrid performance coupled with everything you need for Mobile Video Security Management.


MVR-315A is an intelligent 5CH Hybrid Mobile Network DVR tailor-made for vehicle video surveillance. Incorporating embedded Linux O/S and high-speed processor, MVR-315A features GPS positioning, Geo-fence alarm, 3G/4G cellular network connectivity for realtime remote monitoring, vehicle travel information recording and wireless data upload. MVR-315A supports local HDD record in 720P, AHD, WD1, HD1 and CIF formats. Its modular and rugged design allows flexible installation and easy maintenance while ensures reliability in harsh vehicle surveillance environment.

Key Features

- 4CH AHD + 1CH 720P IP
- 2.5" SATA HDD storage
- Excellent vibration performance
- Modular design for easy installation/maintenance
- GPS positioning and Geo-fence
- 3G/4G connection for live view & remote management
- WIFI automatic file download
- Power-off & surge protection, wide voltage input
- Durable in harsh temperature (-40°C~+70°C)

Dimensions

(unit: mm)

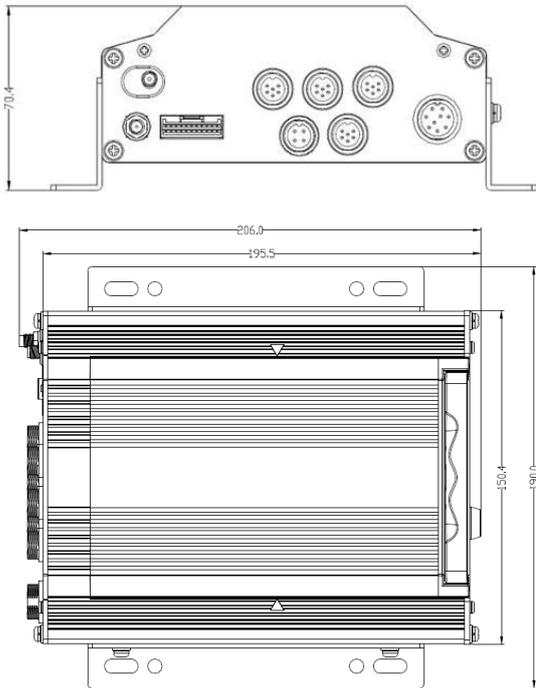

Standard Accessories

Remote control x 1



Screws x 6




MDVR key x 1



Vehicle fuses (7.5A & 15A) x 2



9 pin aviation power input wire x 1



Braces x 2



Technical Specifications

Product series		MVR-315A	
Overview		Preview, Record, Playback, Network, Locate	
System	OS	Linux 3.0.8	
	Control Mode	Mouse, Network (3G/4G/WIFI), Easy Check, CP4	
Video	Input	4 channels AHD + 1 channel 720P	
	Output	1 channel	
	Total Resource	100/120fps @ WD1 + 30fps @ 720P IPC or 60fps @ AHD + 30fps @ 720P IPC	
Audio	Video Signal Standard	Electrical level: 1Vpp Impedance : 75Ω NTSC/PAL Optional	
	Input	5 channels (1 channel IPC audio input)	
	Output	1 channel	
Display	Audio Signal Standard	Electrical level: 2Vpp Input impedance: 4.7kΩ	
	Display Split	1/4	
Recording	OSD	GPS information, alarm, vehicle number, speed, date/time	
	Operation	Semi-transparent GUI	
Playback	Video/Audio Compression	Video: H.264 Audio:ADPCM, G.711A, G.711U	
	Image Resolution	Analog: PAL: 720P(1280x720), WD1(928x576), WHD1(928x288), WCIF(464x288), D1(704x576), HD1(704x288), CIF(352x288); NTSC: 720P(1280x720), WD1(928x480), WHD1(928x240), WCIF(464x240), D1(704x480), HD1(704x240),CIF(352x240); Digital:720P(1280x720)	
	Image Quality	1~8 levels adjustable (1 is the best)	
	Record Mode	Boot up/Manual/schedule/Alarm	
	Pre-recording	0 ~ 60 minutes	
	Post-recording	0 ~ 30 minutes	
	Network	Playback Channel	1 channel by local playback
		Search Mode	Date/time, channel, event
	Locating	IPC Ethernet	6-pin M12 (10/100M x 1, PON power supply)
		Storage	WIFI* 802.11b/g/n
Storage	3G/4G*	EVDO/WCDMA/TDD-LTE/FDD-LTE	
	GPS*	location tracking, speed detection, and sync time	
Interface	Hard Disk	2.5" SATA HDD x 1	
	USB	USB 2.0 x 1	
	SIM	SIM slot x 1	
	RS232	RS232 x 1	
	Sensor	8 inputs, 2 outputs	
	Speed	1 channel pulse speed detection	
	Intercom	1 MIC interface	
Electrical	Panel	CP4 (The multi-functional panel)*	
	Input	DC8~36V, ACC	
Mechanical	Output	5V@1000mA	
	Powerconsumption	32W (Maximum), ≈0W (Standby)	
Environmental	Dimension	206.0x190.0x70.4mm / 8.11"x7.48"x2.772"	
	Weight	1.24kg / 2.734lbs	
PC Software	Operating Temperature	-40°C~+70°C / -40°F~+158°F (with heater) -10°C~+70°C / -14°F~+158°F @ RH 8%~90%	
	Certifications	VMS 2.0	
		EU / USA	
		CE, FCC	

*MVR-315A can be built in with GPS+3G/4G or GPS+WIFI modules.

(*) Optional functions

MVR-315A

5CH AHD Hybrid Mobile DVR

www.vipro.com.tw

Optional Accessories

GPS Module and Antenna

GPS data can be recorded into MDVR video files for playback and reported to CMS for real time vehicle positioning.



3G/4G Module and Antenna

Realize 3G/4G cellular network connectivity for Mobile DVR for live remote video streaming and alarm notification.



WIFI Module and Antenna

Multi-channel wireless network device applied for Mobile DVR on video download and data transfer.



4Pin Male-Female Din-jack Cable

Din-aviation cables are used for MDVR installation in the vehicle. 4 pins (video/audio/ground/power) can provide the power for cameras. Available in different lengths (1.5m,3m,5m,7m,9m,11m,13m,15m,20m or customized) to suit all kinds of vehicle installation.



Serial Expansion Box

Integrate the interface of RS-232 and RS485 to realize the serial communication between external device and MDVR.



Serial Transform Cable



Alarm and I/O Cable



6pin Aviation head to RJ45 Cable



A/V Out Cable



Amplifier & Speaker Transform Cable



6-Axis Sensor (G-force Sensor)

Determine a vehicle sharp turns, braking, intense bumps, rollover, fast changing lanes, S deformation tract and other bad driving habits by the detecting module and correct these bad behaviors via management system.



CP4 Control Panel

The multi-functional Control Panel used for Bus Dispatch System, featuring built-in amplifier, RFID, 7 inch LCD, station announcement.



LED Display Panel

Designed for easier checking of Mobile DVR working status. Any of the LED flash will indicate the corresponding status.



Easy Check

A device management software running on Android tablet, allowing user to manage the MDVR conveniently via the software in WIFI environment, thus improving working and maintenance efficiency.



HDD Reader

For playback recorded footage on PC



UPS (Uninterrupted Power Supply)

A high-performance back-up power solution, using internal electronic circuit to measure, calculate and storage battery data, which makes the use and management of power supply more predictable.



Fireproof Box


Specially designed for anti-fire and anti-explosion to protect the video files in the last minutes of the accidents with built-in 32GB memory.




MVR-315A

5CH AHD Hybrid Mobile DVR

System Diagram

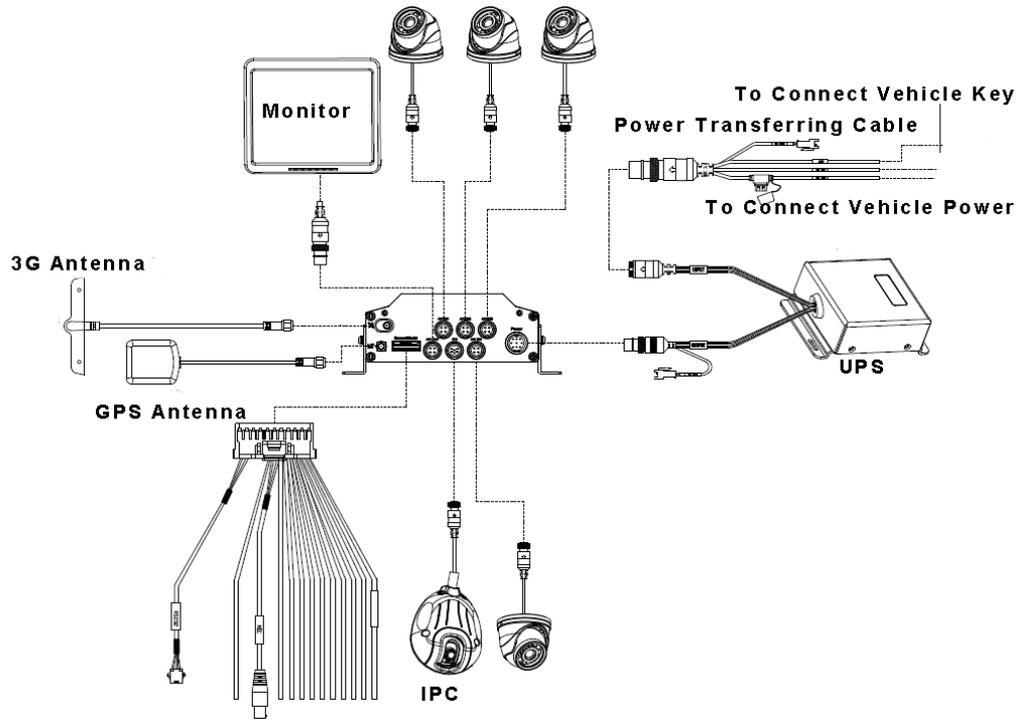


Front Panel

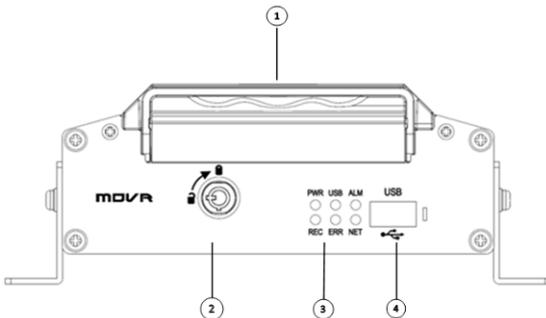

1. HDD module 2. Lock 3. Status LED 4. USB port

- PWR Power indicator lamp: Blue
- ALM Alarm indicator lamp: Red when alarm triggered, or light off.
- REC Record indicator lamp: Green when HDD or SD is recording.
- ERR Error indicator lamp: Red when hard disk works abnormally.
- NET Network indicator lamp: Green when there is 3G/4G module, otherwise, it is light off. It flashes when there is network.

Rear Panel

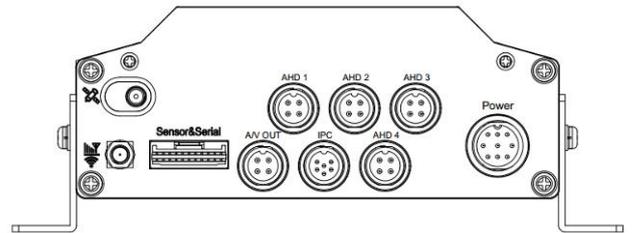

- 1. Power DC 8-36 V Power Input
- 2. Sensor & Serial The Interfaces of Serial Port and Switch
- 3. AHD 1-4 Audio & Video Input 1-4
- 4. A/V OUT Audio & Video Output
- 5. IPC The Interface of PON Power Supply
- 6. GPS Antenna Interface
- 7. 3G/4G/WIFI Antenna Interface

SATA HDD Support List

Brand	Model	Capacity
Western Digital	WD5000LUCT	500G
	WD3200BUCT	320G
	WD10JUCT	1TB
	WD10SPCX	1TB
	WD3200LPVX	320G
	WD3200BPVT	320G
Toshiba	MQ01ABF032	320G
	MQ01ABF050	500G
	MQ01ABD100	1TB

Brand	Model	Capacity
Samsung	ST1000LM024	1TB
	ST500LM012	500G
	ST320LM001	320G
	ST2000LM003	2TB
	HN-500MBB	500G
	HN-M101MBB	1TB
Samsung SSD	MZ-7WD480HCGM-00003	480G
	MZ7WD480HAGM-000H3	480G
Seagate	ST500LT012	500G
	ST500VT000	500G

*The above are recommended, but most SATA HDDs should work with 2TB max.

Storage Capacity Calculation

① Image Quality and Stream

Resolution	Image quality	1	2	3	4	5	6	7	8
Stream (Kbps)	720P	6144	4800	4128	3456	2784	2112	1440	768
	WD1	2662	1997	1599	1331	1170	1040	936	832
	WHD1	1664	1248	998	832	728	650	585	520
	WCIF	1040	780	624	520	455	405	364	325
	D1	2048	1536	1230	1024	900	800	720	640
	HD1	1280	960	768	640	560	500	450	400
	CIF	800	600	480	400	350	312	280	250

② Record File Size Calculation

Each channel record file size:

Recording time (s) x Stream (Kbps) / 8 / 1024 = File Size (MB)

For instance, the file size of the image 1 at D1 resolution within 1 hour:

$3600 \times 2048 \text{ Kbps} / 8 / 1024 = 900 \text{ MB}$

③ Image Quality and Resolution

Resolution	Image quality	1	2	3	4	5	6	7	8
Record (MB)	720P	2700	2109	1814	1518	1223	928	632	337
	WD1	1170	878	702	585	514	456	411	365
	WHD1	731	549	438	365	320	285	257	229
	WCIF	456	343	274	229	199	178	160	143
	D1	900	675	540	450	395	351	316	281
	HD1	562	422	337	281	246	219	198	176
	CIF	351	264	211	176	153	137	123	110